

## FI-S20S Mold Replacement


The existing FI-S20S mold tool will be replaced with a new version. The new tooling will have different mold injection gate locations, which are described in more detail below. JAE will conduct quality checks and a mold inspection to guarantee the same connector quality before starting mass production.

### 1. Affected Part FI-S20S

### 2. Change of Injection Point

#### Current Tool

1 Gate (injection from the point indicated below)

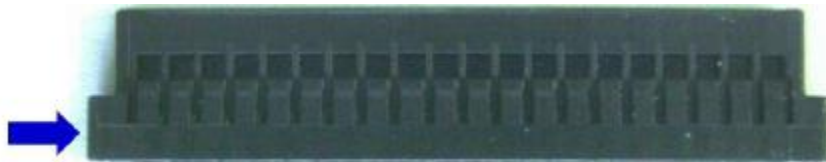

#### New Tool

10 Gates (injection from the points indicated below)



### 3. Schedule

Date	Event
April 2018 (Mid-month)	New mold inspection completed
April 2018 (End of Month)	Start of mass production
April (and onward)	Connectors manufactured with current mold tool will be shipped until existing inventory of parts is cleared.

### 4. Other

- No change for the drawing
- No change for production site

If you have any questions regarding this matter, please contact your JAE account manager.

Thank you for your cooperation.